



**Alltest Instruments, Inc.**

500 Central Ave.  
Farmingdale, NJ 07727

P: (732) 919-3339  
F: (732) 919-3332

**alltest.net**  
sales@alltest.net

## **The test & measurement equipment you need at the price you want.**

Alltest carries the world's largest selection of used/refurbished benchtop test & measurement equipment at 50% the price of new.

Our equipment is guaranteed working, warrantied, and available with certified calibration from our in-house staff of technicians and engineers.

- **10+ full time technicians with over 150 years of specialization**
- **90 day warranty & 5 day right of return on all equipment**
- **1-3 year warranties for new and premium-refurbished equipment**
- **Every unit tested to OEM specifications**
- **Satisfaction guaranteed**

You have plans, we will help you achieve them.  
*Any project. Any budget.*

## **Get a quote today!**

Call (732) 919-3339 or email sales@alltest.net.



## A6312 DC-coupled Current Probe

DC to 100 MHz Bandwidth

Simultaneous AC/DC  
Measurements

High Sensitivity


Split Core Construction Enables  
Easy Circuit Connection

20 Amps DC + Peak AC Current

50 Amps Peak Pulse Current

100 x 10<sup>-6</sup> Amp \* Sec Product

UL, CSA, CE Marking

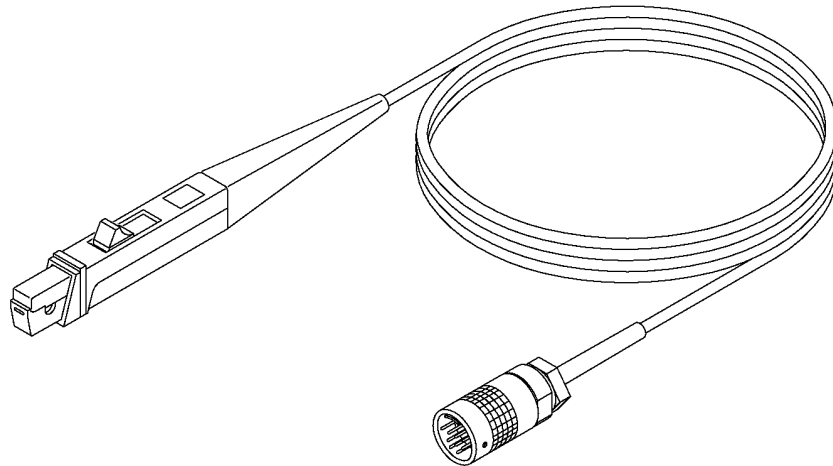

**T**he A6312 is a 100 MHz DC-coupled current probe for use with the AM 503, AM 503A, AM 503B, and AM5030 current probe amplifiers. The combination of an A6312, an AM 503B, and a TM502A provides a flexible current-measurement tool that can display currents up to 20 Amps DC + peak AC and 50 Amps peak pulse on any oscilloscope. It has a split core construction that permits easy connection to the circuit under test. It may be ordered either separately as the A6312 or as Option 05 to the AM 503S.

### SPECIFICATIONS

#### STANDARD SPECIFICATIONS for A6312/AM 503B/TM502A

##### Bandwidth

DC to 100 MHz

##### Maximum DC + Peak AC Current

20 Amps

##### Maximum Peak Pulse Current

50 Amps

##### Minimum Sensitivity

1 mA/div

##### DC Accuracy

±3% (±1.5% typical)

##### Maximum Barewire Voltage

300 Volts (Category I)

#### TYPICAL CHARACTERISTICS

##### Insertion Impedance

0.1 Ohms at 1 MHz  
0.2 Ohms at 50 MHz  
1.0 Ohm at 100 MHz

##### Propagation Delay

17 ns

##### Maximum Conductor Diameter

3.8 mm (0.15 in.)

##### Electrostatic Immunity (per

IEC 801-2)

>8 kV

##### Amp \* Sec Product

100 x 10<sup>-6</sup> Amp \* sec

##### Risetime

3.5 ns

#### PHYSICAL CHARACTERISTICS

##### Probe Weight

0.25 kg (0.56 lbs.)

##### Cable Length

2 m (6.6 ft.)

#### POWER REQUIREMENTS

The A6312 is powered by the AM 503B/TM502A. The performance specifications listed are for this combination of products.

#### A6312 SAFETY

##### CERTIFICATIONS

UL 3111-1

CSA 1010.1

IEC 1010-1, 1010-2-032



## A6312 DC-coupled Current Probe

For further information, contact Tektronix:

<b>ASEAN Countries</b> (65) 356-3900	<b>Japan</b> (Sony/Tektronix Corporation) 81 (3) 3448-4611
<b>Australia &amp; New Zealand</b> 61 (2) 888-7066	<b>Mexico, Central America, &amp; The Caribbean</b> 52 (5) 666-6333
<b>Austria</b> 43 (1) 70177-261	<b>The Netherlands</b> 31235695555
<b>Belgium</b> 32 (2) 725-96-10	<b>Norway</b> 47 (22)070700
<b>Brazil and South America</b> 55 (11) 3741 8360	<b>People's Republic of China</b> (86) 10-62351230
<b>Canada</b> 1 (800) 661-5625	<b>Republic of Korea</b> 82 (2) 528-5299
<b>Denmark</b> 45 (44) 850700	<b>Spain &amp; Portugal</b> 34 (1) 372 6000
<b>Finland</b> 358 (0) 4783 400	<b>Sweden</b> 46 (8) 629 6500
<b>France &amp; North Africa</b> 33 (1) 69 86 81 81	<b>Switzerland</b> 41 (42) 219192
<b>Germany, Eastern Europe, &amp; Middle East</b> 49 (221) 94 77-0	<b>Taiwan</b> 886 (2) 765-6362
<b>Hong Kong</b> (852) 2585-6688	<b>United Kingdom &amp; Eire</b> 44 (1628) 403300
<b>India</b> 91 (80) 2265470	<b>USA</b> 1-800-426-2200
<b>Italy</b> 39 (2) 250861	

### From other areas, contact:

Tektronix, Inc. Export Sales  
P.O. Box 500, M/S 50-255  
Beaverton, Oregon 97077-0001 USA  
(503)627-1916

### Visit our Web site:

World Wide Web: <http://www.tek.com>



Copyright © 1996, Tektronix, Inc.  
All rights reserved. Printed in U.S.A. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks.

### SYSTEM SPECIFICATIONS

	A6312/AM 503B	A6312/AM 5030	A6312/AM 503A	A6312/AM 503
<b>Bandwidth</b>	DC to 100 MHz	DC to 100 MHz	DC to 80 MHz	DC to 100 MHz
<b>Risetime (10% to 90%)</b>	3.5 ns	3.5 ns	4.4 ns	3.5 ns <sup>1</sup>
<b>Aberrations (typical)</b>	7% p-p	7% p-p	7% p-p	7% p-p <sup>1</sup>
<b>DC Gain Accuracy</b>	3% (<1.5% typical)	3%	3%	3%
<b>Noise, RMS (typical)</b>	250 µA	250 µA	250 µA	250 µA

<sup>1</sup> Requires adjustment of R364 (HFComp) in amplifier.

### ORDERING INFORMATION

#### A6312 DC-COUPLED CURRENT PROBE

**Includes:** Instruction Manual P/N 070-9603-00

#### RELATED PRODUCTS

##### AM 503B

Current Probe Amplifier

##### AM 5030

Programmable Current Probe Amplifier

##### AM 503S

Current Measurement System

##### A6302

Current Probe – DC to 50 MHz, 20A

##### A6302XL

Current Probe – DC to 17 MHz, 20A, 8 m cable

##### A6303

Current Probe – DC to 15 MHz, 100A

##### A6303XL

Current Probe – DC to 10 MHz, 100A, 8 m cable

##### A6304XL

Current Probe – DC to 2 MHz, 500A

##### P5200

High Voltage Differential Probe

##### AM 503S

Current Measurement System

Opt 01 – Adds A6303 Probe

Opt 03 – Substitutes A6303 Probe for A6302 Probe

Opt 05 – Substitutes A6312 Probe for A6302 Probe

Opt 09 – Deletes A6302 Probe